
THERMAL PULSE-JET, PORTABLE, PETROL

pulsFOG K-22 portable

A portable pulsFOG K-22 thermal fogger for small rooms and spot treatments. Versions: K-22-O, K-22-BIO.



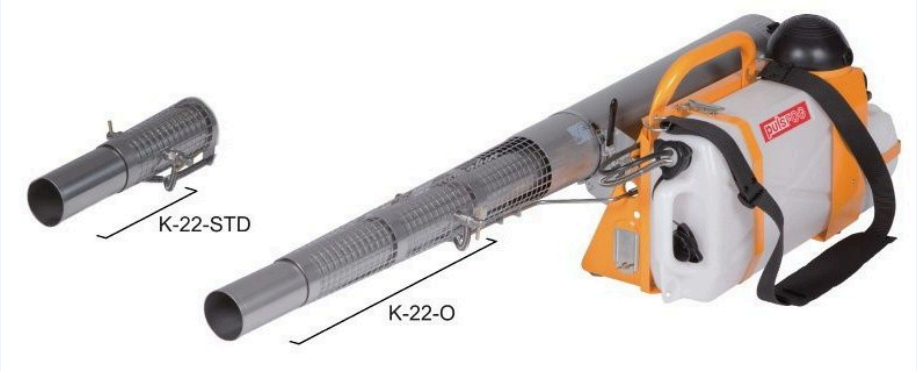

OUTPUT	DROPLET SIZE	SOLUTION TANK	POWER
20–60 L/h	< 25 µm (oil), < 60 µm (oil/water), < 150 µm (water)	9 L (K-22-O), 2 × 5 L (K-22-BIO)	37.4 kW (50.8 hp)

PRICE

on request

We will quote the price and delivery time for your configuration. Message us on WhatsApp and we will reply the same day.

Specifications · pulsFOG K-22 portable

Type	Thermal pulse-jet, portable, petrol
Power	37.4 kW (50.8 hp)
Output	20–60 L/h
Standard output	30 L/h
Droplet size	< 25 µm (oil), < 60 µm (oil/water), < 150 µm (water)
Solution tank	9 L (K-22-O), 2 × 5 L (K-22-BIO)
Fuel tank	2 L
Fuel consumption	3.8 L/h
Drive and supply	electronic ignition from 4 dry batteries (6 V), manual start
Empty weight	10.5 kg (K-22-O), 11 kg (K-22-BIO)
Dimensions (L × W × H)	132 × 33 × 36 cm

Versions

Version	Type
K-22-O	O — oil-based solutions
K-22-BIO	BIO — water cooling

Features

- 1000 cm³ engine
- K-22-O for oil-based and flammable solutions
- K-22-BIO: a second water tank cools the exhaust, for heat-sensitive products and a lower fire risk with flammable solutions

Delivery and service in Kazakhstan

Delivery and customs clearance
We deliver the equipment to your site and handle customs ourselves.

Commissioning and training
We commission the equipment on site and train your operators in Russian or Kazakh.

Payment in tenge and paperwork
A contract with a Kazakh company, payment in tenge and a full set of accounting documents.

Warranty, service and spare parts
Warranty and seasonal maintenance, spare parts and consumables close at hand, in Kazakhstan.

Yermek Zhunussov
Director · Will choose the equipment for your store and answer your questions

+7 700 300 2222 · WhatsApp
+7 777 247 10 90 · WhatsApp
info@tarakan.kz · Almaty

Specifications may change; please confirm when ordering. Trademarks belong to their respective owners. Prepared 22.11.2026.